

1. UL305,ANSI GRADE1级认证, 50万次寿命
2. UL10C防火认证
3. CE认证, EN1125机械性能20万次认证, EN1634防火认证
4. GB30051-2013 一级检测, 90分钟防火
- 5.锁舌为不锈钢304精铸件, 耐磨损
- 6.锁头盖为不锈钢, 强度高
- 7.锁身选用1.2mm厚的不锈钢304或者优质钢, 强度余量大
- 8.盐雾测试240小时, 防锈能力强
- 9.标准配置美标可适用750mm门宽, 欧标可适用1000mm门宽
- 10.定做最大门宽, 美标可适用1400mm门宽, 欧标可适用1066mm门宽
- 11.美标及欧标适用的最小门宽为500mm(需订做)
- 12.适用型材门



1. Compliance : UL305,ANSI/BHMAA156.3 grade 1 , 500,000 times cycle test
- 2.Compliance: UL 10C fire rated
- 3.Compliance: EN1125,200,000 times cycle test ; EN 1634 fire rated
- 4.GB30051-2013 Grade 1 fire-rated
- 5.Latch is stainless steel 304
- 6.cover is stainless steel 304 or steel
- 7.Case is stainless steel or steel,1.2mm thickness
8. Salt spray test, 240 hours
- 9.For 750mm to 1200mm door width
- 10.Max.1400mm door width for ANSI/BHMAA156.3,Max.1066mm for EN1125
- 11.Min.520mm door width is optional
12. Apply to narrow stile door



F901



F906

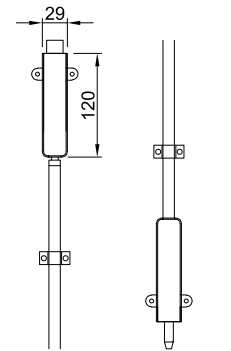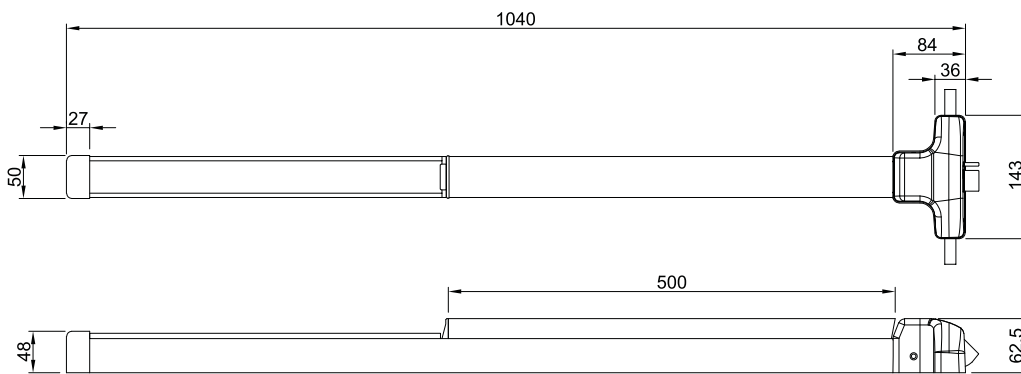

FL-01 FL-02

参数配置 Specification		F901 半长单点平推式逃生门锁	F906 半长天地平推式逃生门锁
锁定方式 Lock point		单点锁定 (1)	天地两点锁定 (2)
适合门宽 Door width	≥520 mm <670mm ≥670 mm	○ ●	○ ●
适合门高 Door height	≤2100 mm ≥2100 mm	— —	● ○
最大门重 Door weight(KG)		200	200
是否适用左开门和右开门 Non handed		●	●
常开机构 Dogging device		○	○
锁舌防撬功能 Security anti-thrust		●	●
是否适用防火(应急)门防烟门 For fire and smoke door		●	●
可配装外装锁 Trim optional	FA001,FA002,FA003	○	○
	FA004,FA005,FA006,FA007	○	○
门厚 Door thickness	50-55mm	●	●
	> 55mm	○	○
UL和CE认证UL,CE certificate		●	●
中国防火标准 China fire rated		●	●
材料 Material		Stainless steel 304/316 or steel	
表面处理 Finish	不锈钢 Stainless steel	SS, PS, PVD	
	优质钢 Steel	Silver, black, white, green	

● = 标配: yes — = 不含此项: NO ○=选配项 optional

注意: 根据欧洲和美国法规, 用在防火门和防烟门的逃生门锁不可以配常开机构。

According to EN/UL standard, dogging is not allowed for fire and smoke door