


- 执行标准：欧盟EN12209:2016.20万次开启标准
EN1634-1:2012.4小时防火标准
EN179:2008.逃生标准
中国GB12955-2008.90分钟3C防火标准
 - 舌头配置：SUS304精铸斜舌、方舌
 - 面板配置：高级耐指纹盖板、SUS304面板
 - 拨轮配置：高精度钢制、一体式
 - 表面处理：不锈钢拉丝、沙金PVD、亮金PVD、镜光
 - 适用门型：木质门、钢质门、平口门、企口门等
 - 方向开启：斜舌可换向，不分左右方向
 - 适用区域：防火门、防烟门等
- Compliance:EN12209:2016+EN179;200,000 life cycle
EN1634-1:2012, 4 hours fire rated
 - Dead bolt and latch bolt are made by casting stainless steel 304
 - Forend is anti-fingerprint stainless steel 304
 - Follower is casting stainless steel 304
 - Finish: SS, satin PVD, polished PVD, polished
 - Suitable for wooden and steel door , flat door, rebated door
 - Non handed
 - Application: fire door, smoke door

72-60TF

自动上锁逃生锁体

Automatic Deadbolt Locking Exit Lock

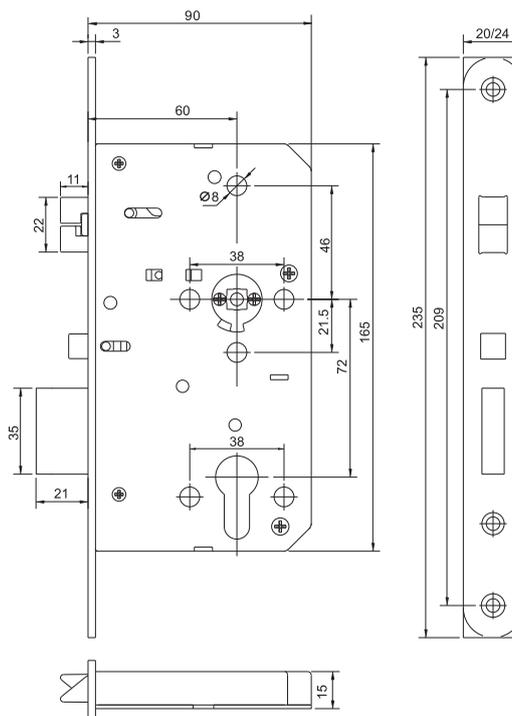

标准配置方案

Standard configuration




配置说明

The detail of standard configuration

- 把手配置：外侧固定把手，内侧推杆逃生锁
- 锁体配置：钢木螺丝及标准100MM长8*8方杆
- 锁芯为单开或者双开，长度依据实际门厚确定
- 适用标准门厚45-50MM, 选配门厚51-70MM
- Handle: Two activity handle for both side, 4 sets of through bolt .
- Lock: screws and 8*8*100mm spindle
- Cylinder: key/key or half cylinder
- Suitable for door thickness 45~50mm. 51~70mm thickness is optional.

换舌方向示意图

Reverse latch for left or right handed door .



功能说明

Function

- 防火门: 门内旋钮压把手开门, 门外钥匙开门
- 防烟门: 门内门外均钥匙开门
- 钥匙可纳入总钥匙管理系统, 实现统一管理
- Fire Door: rotate the handle to open the door from inside, by key from outside.
- Smoke door: open by key in both side
- Master key is available