


- 执行标准：欧盟EN12209:2016, 20万次开启标准  
EN1634-1:2012, 4小时防火标准  
中国GB12955-200890分钟3C防火标准
- 舌头配置：SUS304精铸斜舌
- 面板配置：高级耐指纹盖板, SUS304面板
- 拨轮配置：高精度钢制, 分体式
- 表面处理：不锈钢拉丝, 沙金PVD等
- 适用门型：木质门、钢质门等
- 适用区域：储藏室门, 办公室门, 分区门等

- Compliance: EN12209:2016, 200,000 life cycle  
EN1634-1:2012, 4 hours fire rated
- Latch bolt are made by casting stainless steel 304, 4mm
- Forend is anti-fingerprint stainless steel 304
- Follower is casting stainless steel 304
- Finish: SS, Satin PVD, Polished PVD, Polished
- Suitable for woodend and steel door, flat door, rebated door
- Application: storeroom door, office door, partition door

## 72-60F


### 储藏室及夜锁锁体

#### Night Latch Lock

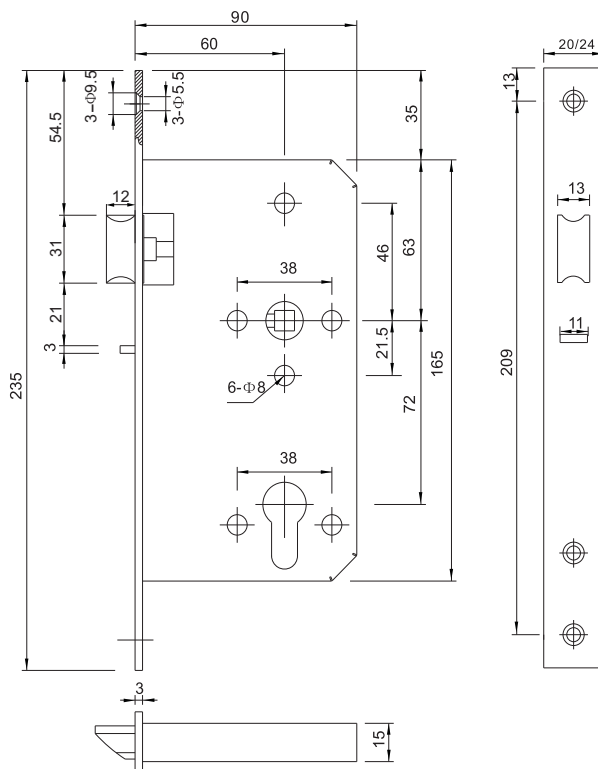

#### 标准配置方案

Standard configuration

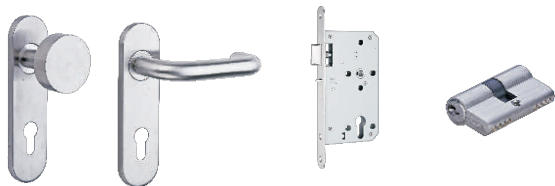


#### 配置说明

The detail of standard configuration

- 把手配置：把手外部固定, 内侧活动, 款式可选
- 锁体配置：钢木螺丝及标准100MM长8\*8方杆
- 锁芯为单开或者双开, 长度依据实际门厚确定
- 适用标准门厚45-50MM, 选配门厚51-70MM
- Handle: Two activity handle for both side, 4 sets of through bolt .
- Lock: screws and 8\*8\*100mm spindle
- Cylinder: key/key or half cylinder
- Suitable for door thickness 45~50mm. 51~70mm thickness is optional.

#### 换舌方向示意图

Reverse latch for left or right handed door .

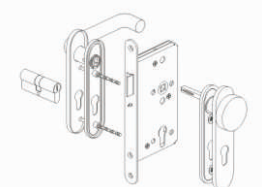

#### 功能说明

Function

- 储藏室门：门内无锁定, 门外钥匙开启
- 办公室门：与电锁扣配合使用, 门内压把手开门门外读卡进门
- 钥匙可纳入总钥匙管理系统, 实现统一管理
- Storeroom door: inside unlocked , open from outside by key
- Office Door: match with the electric lock.  
Press the handle to open from inside. Read the card from outside.
- Master key is available