


单机型报警逃生门锁 Standalone Alarm Device F801/F806

功能描述:

注: F801适用单开门, F801+F806适用双开门


1. 单机语音报警; 可选英文, 中文等各种语言;
2. 钥匙复位;
3. 电池电力不足灯光报警;
4. 更换电池方便;
1. Voice alarm, english, spain, all language are available.
2. Reset by key.
3. With 1 year of standby time.
4. Easy to replace the battery.

100分贝

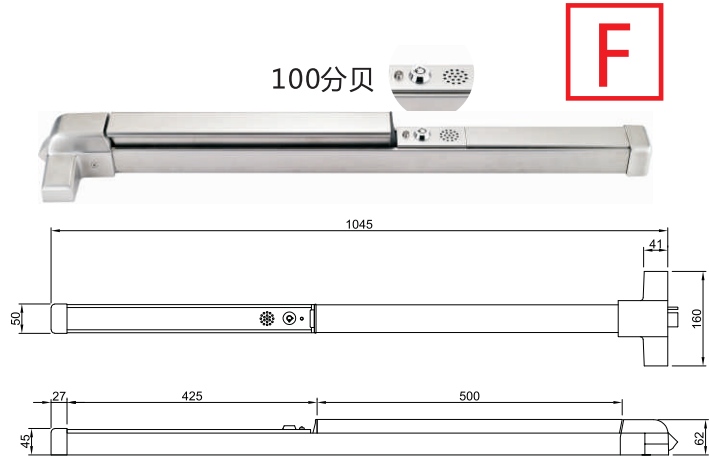

单机延时逃生门锁 (DE) Single Delay Escape Lock F801A-DE/F806A-DE

标准尺寸适用门宽 $\geq 850\text{mm}$, 定制最小门宽 $\geq 600\text{mm}$

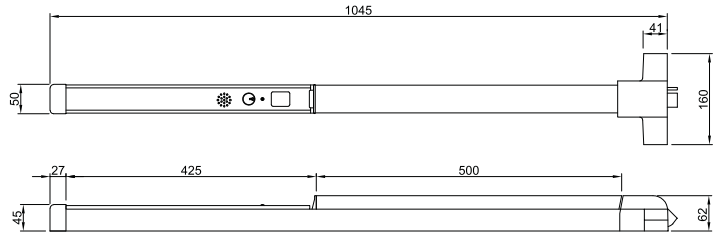

功能说明:

- 1、门内①: 工作时压把手语音报警, 延时1-15秒后报警解除, 推把开门
 门内②: 采用主体钥匙复位功能, 解除报警, 推把开门
 门外①: 配置电控把手锁, 需读卡授权释放把手 (断电开) 开门, 压把手开门
 门外②: 配置机械把手锁, 需钥匙解锁把手, 压把手开门
- 2、门锁主体采用12V供电, 断电后主体实现纯机械工作原理
- 3、以上功能可适用单门门锁和双门门锁;
- 4、可选联机数显型: BDE
- 5、认证:
 UI305 50万次
 UL10C 1.5小时防火

Function explanation:

- 1、Door①: When working, press the handle voice alarm, delay 1-15 seconds after the alarm is lifted, push the handle to open the door
 Door②: Adopt the main key reset function, remove the alarm, push the door
 Outside the door①: Electronic control handle lock, need to read the card to authorize the release handle (power off) to open the door, press the handle to open the door
 Outside the door②: Equipped with mechanical lock handle, need key to unlock handle, press handle to open the door
- 2、The main body of the door lock adopts 12V power supply. After power is cut off, the main body realizes pure mechanical working principle
- 3、The above functions can be applied to single door lock and double door lock
- 4、Optional online digital display: BDE
- 5、Certification:
 UL305 500,000 times
 UL10C 1.5 hours fire protection