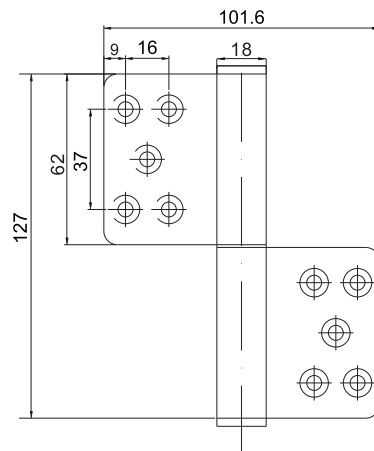


F


H504030

旗式防火合页

Fire rated flag hinge

执行标准: 中国GB12955-2008

防火标准: 90分钟防火

表面处理: 不锈钢拉丝, 青古铜, 红古铜, PVD

适用门型: 木质及钢制防火门, 防盗门, 工业大门等

配件描述: 钢制M6*16机螺丝或M5*32木螺丝

轴心直径: 12-18MM钢制


Certificated by GB12955-2008, 90mins fire rated

Finish: SS, AB, PS and PVD

Suit for: Wooden/steel door, security door, industrial door

Accessories : steel M6*16 bolt or M5*32 screw

Diameter of bear: 12-18mm, steel

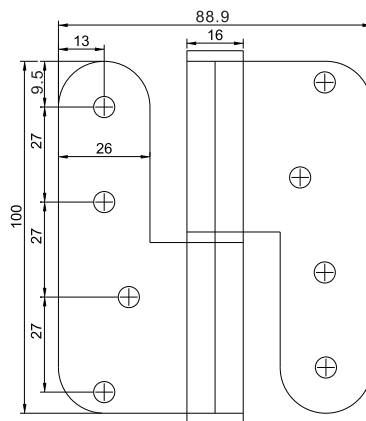

H403530

旗式内门合页

Fire rated flag hinge

表面处理: SS

适用门型: 钢质门

配件: 钢制M4x12机螺丝


轴心: 9mm

Finish: SS;

Suit for: Steel door;

Accessory: steel M4x12 screws

Diameter of bear: 9mm

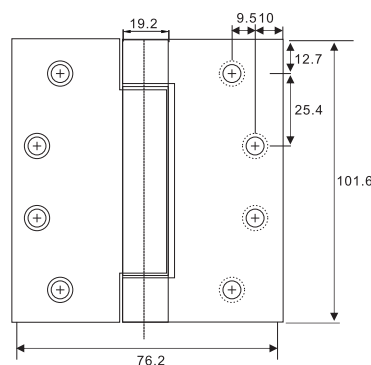

T454034/T454030

T404030

单开弹簧合页

Single Spring Hinge

表面处理: SS

适用门型: 钢质门, 木门

Finish: SS

Suit for: Steel door, Wood door