




504030-2BB 503530-2BB 503030-2BB
454530-2BB 454030-2BB 404030-2BB
403530-2BB 403030-2BB


欧标防火轴承合页
Fire rated butt bearing hinge

适用门厚 Door thickness	合页规格 Hinge Size	适用门重 Door weight	使用数量 Quantity
45-50MM	4*4	55-80KG	3片
51-55MM	4.5*4	70-85KG	3片
56-65MM	5*4	70-85KG	3片


注：合页可带NRP,可选





504030-2BB
503530-2BB
503030-2BB



454530-2BB
454030-2BB



404030-2BB
403530-2BB
403030-2BB

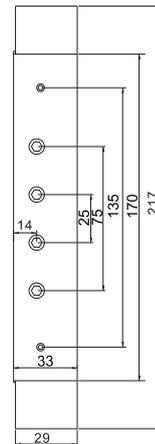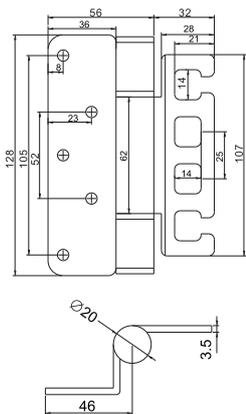

S510
德制可调合页
Adjustable hinges

执行标准：德制DIN标准
 中国GB12955-2008防火标准
 功能配置：上下前后可调
 材质配置：SUS 304 叶片铁制调节盒
 承重配置：100-300KG/2-4片
 适用配置：钢质、型材等入户装甲门
 适用门厚：50-70MM

For unrebated doors on wooden, steel or aluminium frames
 With OBX adjustable frame box adjustable in three dimensions
 Inner, firmly rotating axis
 Wear and maintenance-free ball bearing technology
 Suitable for entrance metal and narrow stile door
 Can be used DIN left and DIN right without modification