


F


BX 01

木质门防火插销

Fire Rated Flush Bolt For Wooden Door

执行标准: 中国GB12955-2008
 防火标准: 90分钟防火
 表面处理: 不锈钢拉丝, PVD
 材质说明: SUS304
 适用门型: 木质防火门
 可选规格: 6寸/8寸/12寸/18寸
 安装位置: 从动门扇的两端

Compliance: GB12955-2008, fire rated 90 mins.

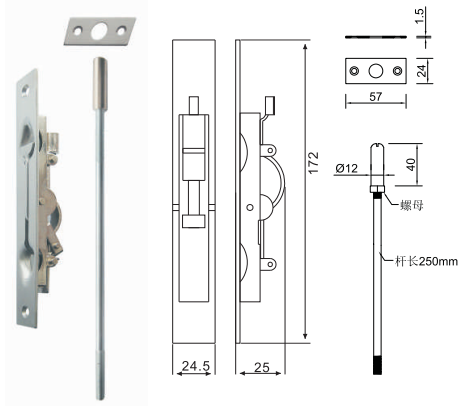
Finish: SS, PVD

Material: stainless steel 304

Suit for wooden fire rated door

Size: 6"/8"/12"/18"

Location: Both ends of the driven door

F


BX 02

钢质门防火插销

Fire Rated Flush Bolt For Steel Door

执行标准: 中国GB12955-2008
 防火标准: 90分钟防火, UL10C-3小时防火
 表面处理: 不锈钢拉丝
 材质说明: SUS304
 适用门型: 钢质防火门
 连杆配置: 250mm长双头螺纹连杆, 直径7mm
 安装位置: 从动门扇的两端

Compliance: GB12955-2008, fire rated 90 mins UL10C-3H

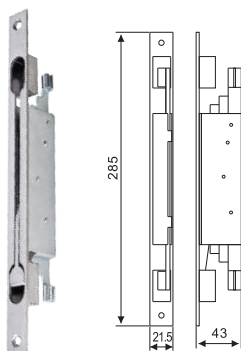
Finish: SS

Material: stainless steel 304

Suit for steel fire rated door

Accessories : 250mm length bolt, Diameter 7 mm

Installed position: Both ends of the driven door

F


BX 03

钢质门双向防火插销

Fire Rated Flush Bolt For Steel Door

执行标准: 中国GB12955-2008
 防火标准: 90分钟防火
 表面处理: 不锈钢拉丝
 材质说明: SUS304
 适用门型: 钢质防火门
 连杆配置: 出厂不配连杆, 可采用常规M6螺纹杆
 安装位置: 从动门扇的中间位置

Compliance: GB12955-2008, fire rated 90 mins.

Finish: SS

Material: stainless steel 304

Suit for steel fire proof door

Accessories : M6 bolt optional

Location: middle of the driven door