


72-55TD/72-60TD/72-65TD

欧标机电锁体(在线型)

EN Standard Electrified Mortise Lock (Solenoid)

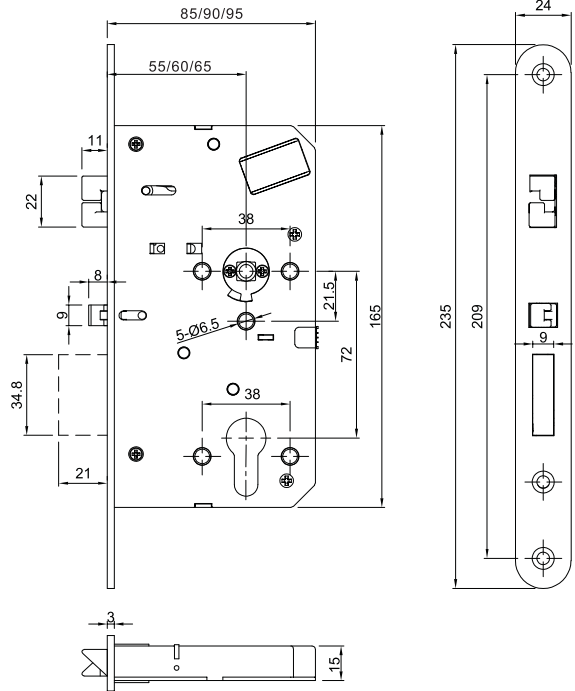

- 执行标准: 机械性能通过欧洲EN12209-2016, 20万次开启标准
防火性能通过欧洲EN1634-1:2012, 4小时防火标准
逃生性能通过欧洲EN179:2008
符合以下标准: EN1125 EN14846 EN61000-6-1
EN61000-6-3

- 监控点: 辅助舌, 方舌, 把手, 钥匙
- 开锁状态: 断电上锁/断电开锁
- 输入电压: 12-24V DC
- 工作电流: 初始500mA, 运行200mA
- 适用门厚: 标准门厚45-50mm, 选配门厚51-70mm
- 安装中心距: 55/60/65mm
- 表面处理: SS, PVD, PS

- Compliance: EN12209:2016, 200,000 life cycle
EN1634-1:2012, 4 hours fire rated
EN1125 EN14846 EN61000-6-1 EN61000-6-3

- Monitoring: ALM, DM, REX, KO
- Lock state: NC/NO
- Input voltage: 12-24V DC
- Output current: 200mA
- Door Thickness: 45-50mm standard. Optional 51-70mm
- Backset: 55/60/65mm
- Finish: SS, PVD PS

- 方向开启: 不分左右开启
- 适用门型: 金属门
- 适用区域: 高保安的公共场所
- 可纳入美标/欧标混合总钥匙系统

- Non handed
- Non handed Applicable door: steel door
- Application: Security and retracted access areas
- Optional: master key

订货型号例 Model example: 72-60TD-REX-ALM-Xx-xx

功能描述 Function: SE-无监控 NO Monitoring; REX-监控把手 Handle, Request to exit; ALM- 监控辅助舌 Auxiliary latch; DM-监控呆 Deadbolt;
KO-监控钥匙开门 Key override, EU-断电关 NC; EL-断电开 NC.