


U53-TD

美标机电插芯锁体(在线型)

ANSI Electrified Lock(solenoid)

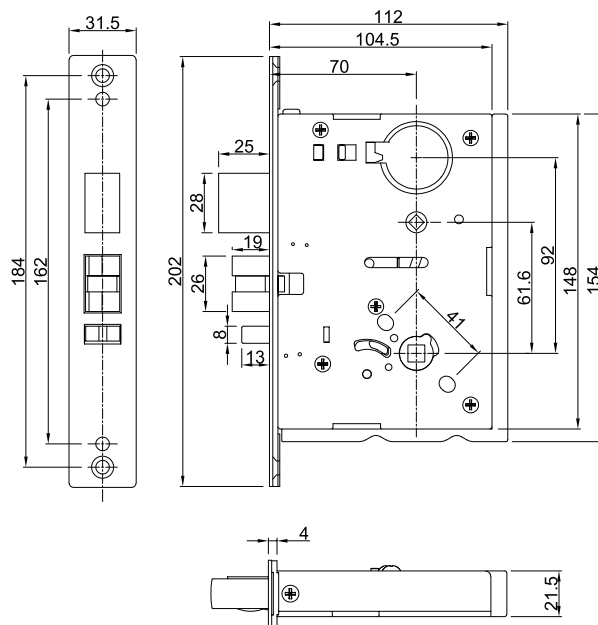

规格与性能

- 执行标准: 电控性能通过美国ANSI BHMAA156.25-2007
 机械性能通过美国ANSI A156.13-2005—级)
 防火性能通过中国GB12955-2008要求的
 甲级1.5小时防火型式检验;
- 监控点: 辅助舌, 把手, 钥匙, 方舌
- 开锁状态: 断电上锁/断电开锁;
- 输入电压: 12V
- 输出电流: 600mA
- 承受载荷: 锁舌6000N,把手1600N;
- 适用门厚: 1-3/8"(35mm)-2-1/2"(64mm); 标准门厚1-3/4"(45mm)
- 安装门边距: 2-3/4"(70mm)
- 表面处理: SS、PVD、PS

SPECIFICATION

- Compliance: Electronics,ANSI/BHMAA156.25-2007
 Mechanics,ANSI/BHMAA156.13-2005 Grade 1
 Fire rated,GB12955-2008,90 mins
- Monitoring:ALM,DM,REX,KO
- Lock state: Locked when power off/open the next power off
- Input voltage: 12V
- Output current: 600mA
- Loading: Latch 6000N,handle1600N
- DoorThickness:1-3/4" (45mm) standard,Optional 1-3/8"(35mm), 2-1/2"(64mm)
- Backset: 2-3/4" (70mm)
- Finish: SS,PVD,PS

- 方向开启:不分左右开启
- 适用门型:金属门
- 适用区域:高保安的公共场所
- 可纳入美标/欧标混合总钥匙系统

- Non handed
- Applicable door: steel door
- Application: Security and retracted accss areas
- Optional: master key

订货型号例Model example:U70-TD-LM-REX-ALM-xx-xx

功能描述Function:SE-无监控NOMonitoring;REX-监控把手Handle,Rgquest to exit;LM-监控斜舌LatchboltALM-监控辅助舌 Auxiliry latch
 DM-监控呆舌Deadbolt;KO-监控钥匙开门Key override,EU-断电关NC; EL-断电开NO