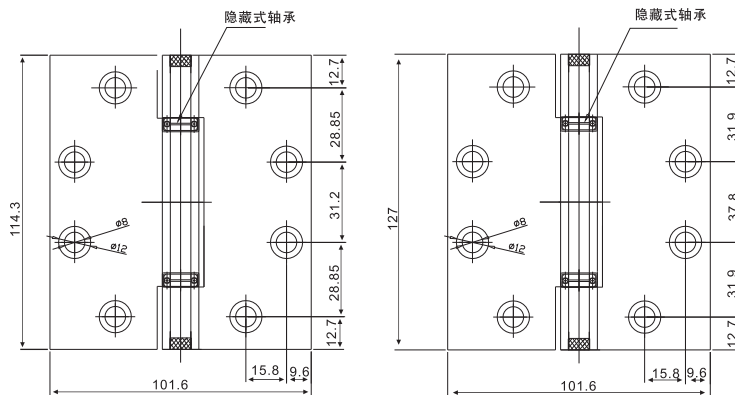
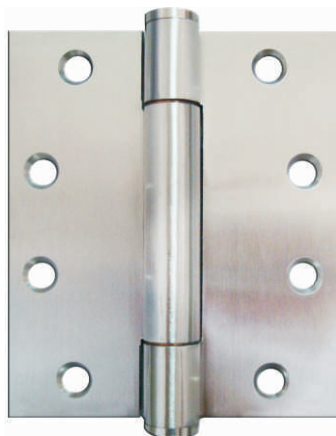


F


504034/454034 美标防火隐藏轴承合页

执行标准：美国ANSI标准ANSI BHMAA156.1-2000
 中国GB12955-2008防火标准, 90分钟防火

轴承配置：隐形暗轴承, 抗摩擦力更强

叶片配置：进口SUS304材质

承重配置：35KG/片

适用门厚：50-70MM

Compliance: ANSI/BHMA A156.1-2000


Fire rated, CHINA GB12955-2008, 90mins"

Bearing: fully concealed bearing design, integrated high performance bearings, low friction

Leaf: stainless steel 304

Load: 35kg/pcs

Door thickness: 50~70mm

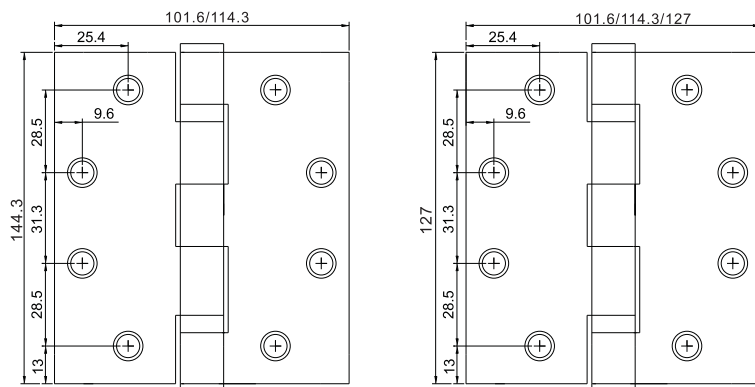
F


454034/454534-2BB

454046/454546/504048/504548/505048-4BB

美标防火抽芯合页

执行标准：美国ANSI标准 ANSI BHMAA156.1-2000
 中国GB12955-2008防火标准, 90分钟防火

产品配置：304不锈钢304叶片, 带NRP抽芯功能

承重配置：35-50KG/片

适用门型：50-70MM, 钢制防火门

Compliance: ANSI/BHMA A156.1-2000

GB12955-2008, 90 mins fire rated

Loading: 35kg/piece

Suitable for steel door, thickness 50-70mm

Material: Stianless steel 304 with NRP pin