


MD 530

折臂型联动闭门器

Fire Linkage Door Closer



适用于常开防火门
For Normally Open Fire Door

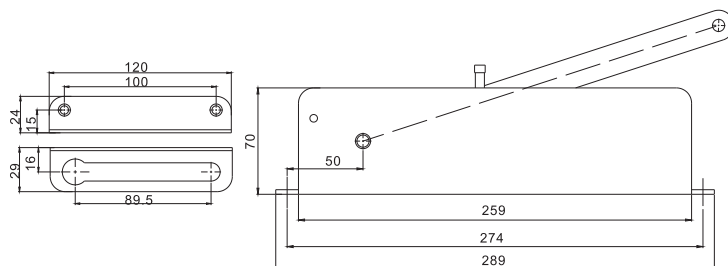


关门信号：防火门监控主机释放信号，
手动释放按钮信号
反馈功能：常开或者常闭信号反馈
自动停门：分左右开启方向
材质说明：铝铸一体式缸体，铸铁摇臂，不锈钢外壳
表面处理：不锈钢拉丝
技术参数：适用门重65KG
工作电流：80~100mA
适用电压：DC 24V
运用配合：通常与防火门监控主机和系统运用
关门时间：2~5秒

Signal to close the door :Control center;
emergency manual button
Signal output: door open/door close Handed
Material: Body: die-casting aluminum alloy
Arm: casting steel
Cover: stainless steel
Max door weight 65KG
Operating current: 80-100mA
Operating volt: DC 24V
Application: fire system
Delay time: 2-5s

MD 550

滑臂型联动闭门器

Fire Linkage Door Closer

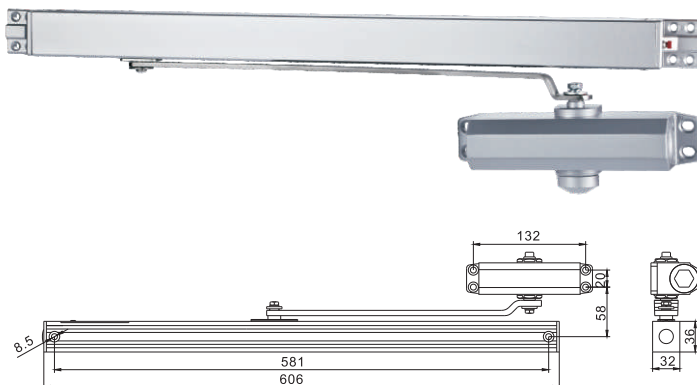

适用于常开防火门
For Normally Open Fire Door

关门信号：防火门监控主机释放信号，
手动释放按钮信号
反馈功能：常开或者常闭信号反馈
自动停门：分左右开启方向
材质说明：铝铸一体式缸体，铸铁摇臂，不锈钢外壳
表面处理：不锈钢拉丝
技术参数：依据门体重量可选择合适主体45-150KG
工作电流：80mA
适用电压：DC 24V
运用配合：通常与防火门监控主机和系统运用
关门时间：2~5秒

Signal to close the door :
Temperature higher than 68 degree;
Control center;
Emergency manual button
Signal output:
door open/door close Handed
Material:
Body: die-casting aluminum alloy
Arm: casting steel
Cover: stainless steel
Max door weight 45-150KG
Operating current: 80mA
Operating volt: DC 24V
Application: fire system
Delay time: 2-5s