




S81 地装式防烟电磁门吸

Floor Mouted Electromagnetic Door Holder



锁体尺寸: 长110x宽80x厚83(mm)	Size: 110mmx80mmx83mm
吸板尺寸: 长100x宽53x厚53(mm)	Magnet size: 100x53x53mm
最大拉力: 50kg(110Lbs)直线拉力	Holding force: up to 50kg(110lb)
选用配置: 配有手动关门释放按钮	Optional: manual button
工作电流: DC12V/140mA DC24V/70mA	Voltage input: DC 12V/140mA DC 24V/70mA
适用门型: 各种单开或双开式防烟门	Application: single or double fire proof door and smook proof door
表面温度: 低于环境温度+20 以内	Surface Temperature: less than 20°C
适用温度: -10~55°C (14-131F)	Operation Temperature: -10-55°C(14-131f)
适用湿度: 0~90%相对湿度	Operation Humidity: 0-90%

安装示意图:

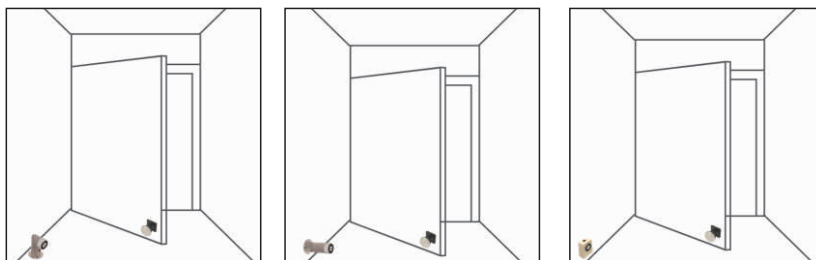

PS-800 门禁电源

Power Supply Controller

电源输入: 220V	Input Voltage: 220V
直流输出: 空载输出14VDC负载输出12VDC	Output Voltage: 12VDC-14VDC
电流输出: 3A, 瞬间输出电流3A	Current Draw : 3A
信号输出: NC/NO, 可以控制各种类型电锁	Output Contact: NC/NO, Access control, Electric Lock, Release Button
延时信号: 开锁延时可设定0-10秒	Time Relay: 0~10sec.
出门信号: 出门按钮信号, 直接开启电锁	Press the button to locked
自动保护: 短路时, 电源自动断开	Short Circuit protection
尺寸: 180mm X 79mm X 72mm	Size: 180mmx79mmx72mm



G-200 过线器

Power Transfer Device

材质说明: SUS304精铸接头	Material: stainless steel 304
SUS304冲压底壳	Size:236mmX25.5mmX18mm
尺寸: 236mmX25.5mmX18mm	