

1. 通过UL305 ANSI/BHMA A156.3 1级认证, 50万次寿命
2. 通过UL10C防火认证
3. 通过CE认证, EN1125机械性能20万次认证, EN1634防火认证
4. 通过GB30051-2013 一级检测, 120分钟防火
5. 锁舌为不锈钢304精铸件, 耐磨损;
6. 锁头盖为不锈钢或者45号钢精铸件, 强度高
7. 锁身选用1.2mm厚的不锈钢304或者优质钢, 强度余量大
8. 盐雾测试240小时, 防锈能力强
9. 标准配置美标可适用1000mm门宽, 欧标可适用833mm门宽
10. 定做最大门宽, 美标可适用1400mm门宽, 欧标可适用1166mm门宽
11. 美标及欧标适用的最小门宽为520mm(需订做)

1. Certificate : UL305,ANSI/BHMA A156.3 grade 1,cycle 500,000 times
2. Certificate: UL 10C fire rated
3. Certificate: CE、EN1125,200,000 times cycle test ; EN 1634 fire rated
4. GB30051-2013 Grade 1 fire-rated
5. Latch is stainless steel 304
6. Cover is stainless steel 304 or steel.
7. Case is stainless steel or steel, 1.2mm thickness
8. Salt spray test, 240 hours
9. For 750mm to 1200mm door width
10. Max. 1400mm door width for ANSI/BHMA A156.3, Max. 1166mm for EN1125
11. Min. 520mm door width is optional





F103



F101



F106

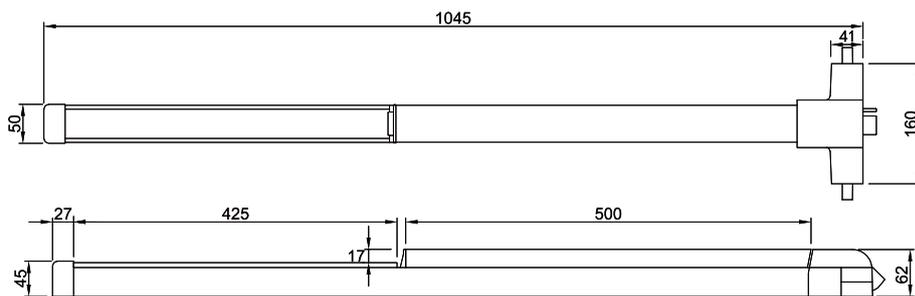

FL-01 FL-02

参数配置 Specification		F101 半长单点平推式逃生门锁	F103 半长常开单点平推式逃生门锁	F106 半长天地平推式逃生门锁
锁定方式 Lock point		单点锁定(1)	单点锁定(1)	天地两点锁定(2)
适合门宽 Door width	≥520 mm ≤670mm	○	○	○
	≥670 mm	●	●	●
适合门高 Door height	≤2100 mm	—	—	●
	≥2100 mm	—	—	○
最大门重 Door weight(KG)		200	200	200
是否适用左开门和右开门 Non handed		●	●	●
常开机构 Dogging device		○	●	○
锁舌防撬功能 Security anti-thrust		●	—	●
是否适用防火(应急)门防烟门 For fire and smoke door		●	仅适用逃生(应急)门(Emergency door only)	●
可配装外装锁 Trim optional	FA001,FA002,FA003	○	○	○
	FA004,FA005,FA006,FA007	○	○	○
	FA008,FA009,FA010,FA011,FA801	○	○	○
门厚 Door thickness	50-55mm	●	●	●
	> 55mm	○	○	○
UL和CE认证UL,CE certificate		●	—	●
中国防火标准 China fire rated		●	●	●
材料 Material		Stainless steel 304/316 or steel		
表面处理 Finish	不锈钢 Stainless steel	SS, PS,PVD		
	铁烤漆 Steel	Silver, black, white, green		

● = 标配; yes — = 不含此项; no ○=选配项 optional

注意:根据欧洲和美国法规, 用在防火门和防烟门的逃生门锁不可以配常开机构。

According to EN/UL standard, dogging is not allowed for fire and smoke door