


- 1.符合EN179寿命测试20万次
- 2.符合GB30051-2013一级检测, 90分钟防火
- 3.锁舌为不锈钢304精铸件, 耐磨损。
- 4.锁头盖为不锈钢或者45号钢, 强度高, 护锁机构
- 5.盐雾测试240小时, 防锈能力强

- 1.Compliance: EN179, cycle test 200,000 times
- 2.GB30051-2013 Grade 1 fire-rated
- 3.Latch is stainless steel 304
- 4.Cover is stainless steel 304 or steel
- 5.Salt spray test, 240 hours

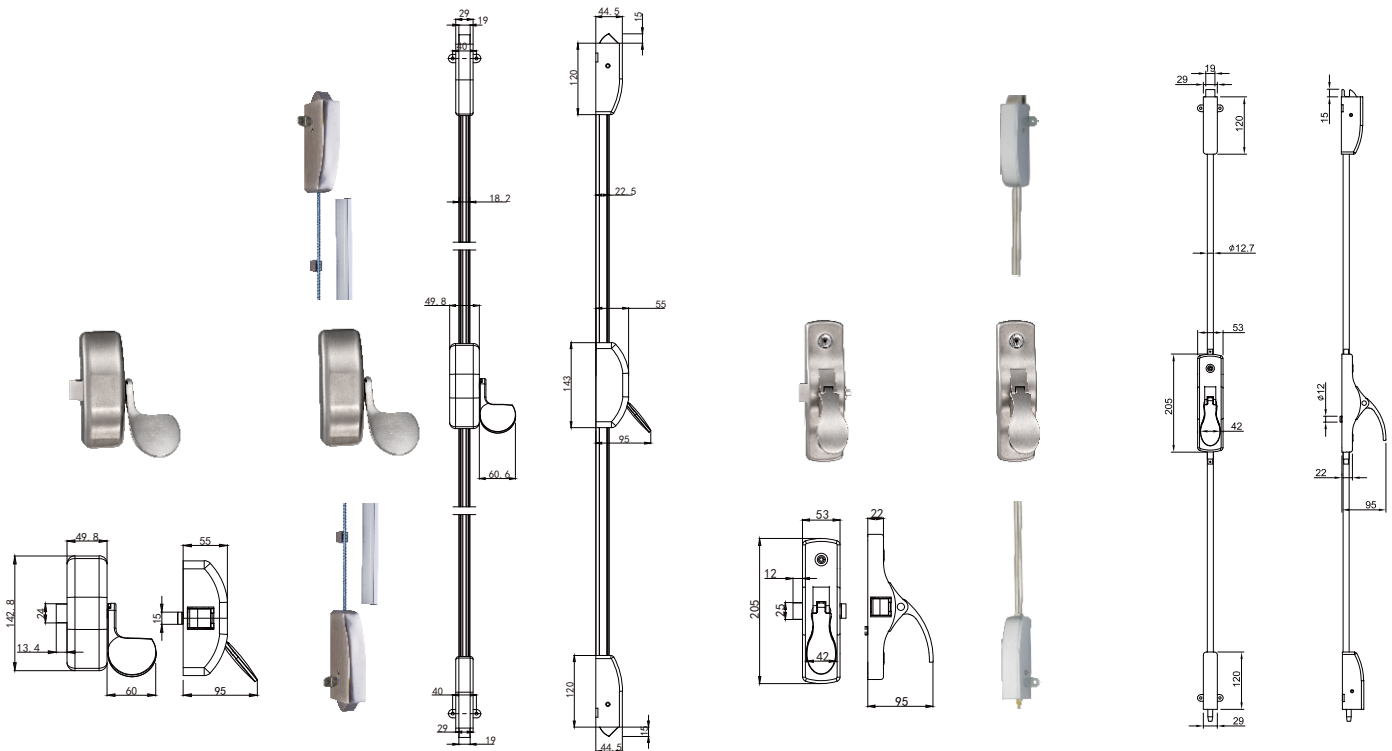

F571

F576

F271

F276

参数配置 Specification		F271	F276	F571	F576
锁定方式 Lock point		单舌锁 (1)	天地锁定 (2)	单舌锁 (1)	天地锁定 (2)
适合门宽 Door width		—			
适合门高 Door height	≤2100 mm	—	●	—	●
	≥2100 mm	—	○	—	○
最大门重 Door weight(KG)		200	200	200	200
是否适用左开门和右开门 Non handed		○	●	●	●
常开机构 Dogging device		○	○	○	○
是否适用防火(应急)门防烟门 For fire and smoke door		●	●	●	●
可配装外装锁 Trim optional	FA001,FA002,FA003	○	○	○	○
	FA004,FA005,FA006,FA007	○	○	○	○
FA008,FA009,FA010,FA011,FA801		○	○	○	○
门厚 Door thickness	50-55mm	●	●	●	●
	> 55mm	○	○	○	○
中国防火标准 China fire rated		●	●	●	●
材料 Material		Stainless steel 304/316 or steel			
表面处理 Finish	不锈钢 Stainless steel	SS, PS,PVD			
	优质钢 Steel	Silver, black, white, green			

● = 标配; yes — = 不含此项; no ○=选配项 optional

注意:根据欧洲和美国法规, 用在防火门和防烟门的逃生门锁不可以配常开机构。

According to EN/UL standard, dogging is not allowed for fire and smoke door