


高级商用门控逃生五金系统 COMMERCIAL EXIT DOOR HARDWARE

美标报警逃生门锁系列 ALARM DEVICE

- 1.符合ANSI/BHMA A156.3-1级, 50万次认证
- 2.符合UL10C 3小时防火认证, 通过GB30051-2013一级防火
- 3.自带安全防护防推装置
- 4.不分左右开启方向
- 5.材质: 铝, 铁, 不锈钢304三种材质可选
- 6.表面处理: SS/铝本色/PSS/PVD

- 1.Compliance with ANSI/BHMA A156.3, grade 1, cycles test 500,000
- 2.Compliance with UL10C, fire rated 3 hours ,Certificate GB30051-2013
- 3.Security anti-thrust design
- 4.None handed
- 5.Material : Aluminum, steel, stainless steel
- 6.Finish: passivation aluminum/PVD/PSS/SS

适用酒店宴会厅、通道门主体木质门或钢质门

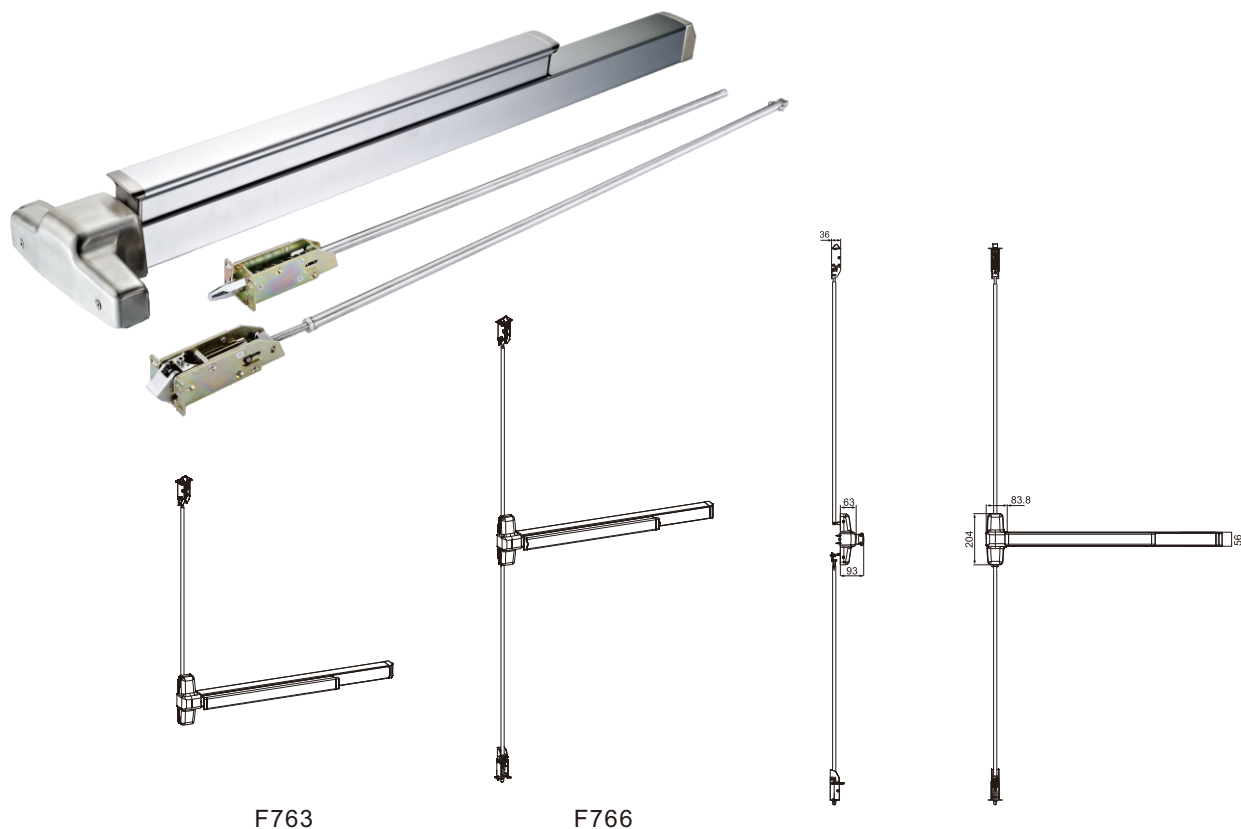

F763

F766

参数配置 Specification		F763	F766
锁定方式 Lock point		1	2
适合门宽 Door width	≥530 mm <680mm	○	○
	≥680 mm	●	●
适合门高 Door height	≤2133 mm	●	●
	≥2100 mm	○	○
最大门重 Door weight(KG)		200	200
是否适用左开门和右开门 Non handed		●	●
常开机构 Dogging device		○	○
是否适用防火(应急)门防烟门 For fire and smoke door		●	●
可配装外装锁 Trim optional	FA001,FA002,FA003	○	○
	FA004,FA005,FA006,FA007	○	○
	FA008,FA009,FA010,FA011,FA801	○	○
门厚 Door thickness	50-55mm	●	●
	> 55mm	○	○
中国防火标准 China fire rated		●	●
材料 Material		Stainless steel 304/316 or steel	Stainless steel 304/316 or steel
表面处理 Finish	不锈钢 Stainless steel	SS, PS,PVD	SS, PS,PVD
	优质钢 Steel	Silver, black, white, green	Silver, black, white, green

● = 标配; yes — = 不含此项; no ○=选配项 optional

注意: 根据欧洲和美国法规, 用在防火门和防烟门的逃生门锁不可以配常开机构。

According to EN/UL standard, dogging is not allowed for fire and smoke door