
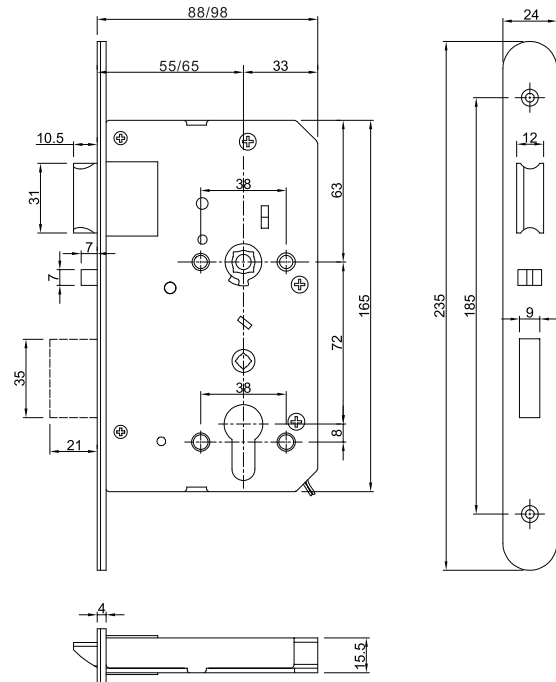


72-55TMA/65TMA

欧标机电锁体(离线型)

EN Standard Electrified Mortise Lock(Motor)

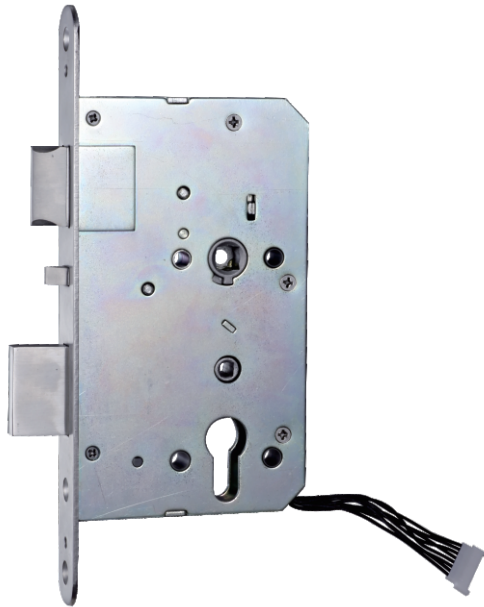

- 执行标准:机械性能通过欧洲EN12209-2016, 20万次开启标准
防火性能通过欧洲EN1634-1:2012, 4小时防火标准
- 监控点:斜舌, 方舌, 保险舌, 把手, 钥匙
- 开闭状态:马达开锁/上锁
- 输入电压: 3.3V-6V DC
- 工作电流运行600mA
- 额定功率: 12.5W
- 使用寿命: 30万次
- 适用门厚:标准门厚45-50MM. 选配门厚51-70MM
- 表面处理: SS, PVD, PS

- Compliance with: EN12209:2016, 200,000 life cycle
EN1634-1:2012, 4 hours fire rated
- Monitoring:ALM,LM,DM, REX,KO
- Locked status: motor lock/unlock
- Input volt: 3.3V-6V DC
- Current: Max600mA
- Power ratings: 12.5w
- Cycles: 300,000
- Suitable door thickness: 45-50mm
- Optional door thickness: 51-70mm
- Finish:SS, PVD, PS

- 方向开启:不分左右开启
- 适用门型:金属门
- 适用区域:高保安的公共场所
- 可纳入美标/欧标混合总钥匙系统
- 适用于电锁, 酒店锁

- Non handed
- Non handedApplicable door: steel door
- Application: Security and retracted access areas
- Optional: master key
- Suitable for electronic lock, hotel lock

订货型号例Model example: 72-60TM-LM-REX-ALM-xx-Xx

功能描述Function: SE-无 监控NO Monitoring;REX-监控把手Handle,Request to exit;LM-监控斜舌Latchbolt;ALM-监控辅助舌Auxiliary latch;;DM-监控呆Deadbolt;KO-监控钥匙开门Key override.