

## M625 明装式闭门器

### Surface Mounted Door Closer

执行标准：欧盟EN1154,EN1634-2H标准

中国XF93-2004 1级防火标准

功能特性：闭锁速度可调，闭门速度可调

适用于木质门、金属门等

停门功能块为可选配件

不分左右方向开启

材质说明：铝材一体式缸体

表面处理：银白、古铜、金/银色

技术参数：闭门力量EN2-5，承重25-100KG

适用最大门宽1250MM

门最大开启角度150°

闭门速度150-15°

可调闭锁速度15-0° 可调

Compliance: EN1154,EN1634-2H

XF93-2004 G1, fire rated

Function: Adjustable closing & latching speed

Suit for wooden and steel door

Optional builtin HOLD-open

Non-handed

Material: Aluminum alloy body

Finish: Silver, optional golden

Feature: Spring power EN2-5, door weight 25-100KG

Max door width 1250mm


Max opening angle is 150 degree

Closing speed adjustable in the range 150-15degree

Latching speed adjustable in the range 15-0degree



凸轮结构  
Cam Action

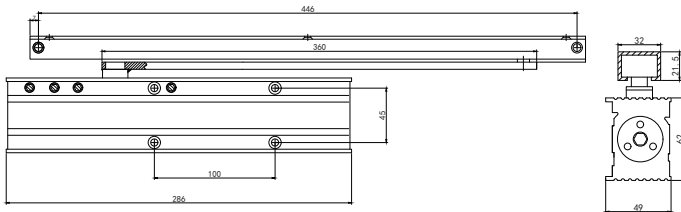

## M630 明装式闭门器

### Surface Mounted Door Closer

执行标准：欧盟EN1154,EN1634-2H标准

中国XF93-2004 1级防火标准

功能特性：开门缓冲功能（BC）标配

关门延时功能（DA）可选

闭锁速度可调，闭门速度可调

适用于木质门、金属门等

滑槽臂和普通折臂可选

滑槽停门块和停门折臂可选

材质说明：铝铸一体式缸体，铸铁摇臂

表面处理：银白、古铜、金/银色

技术参数：闭门力量EN1-6，承重60-150KG

最大门宽1400MM

门最大开启角度180°

闭门速度180-15° 可调

闭锁速度15-0° 可调

Compliance: EN1154, EN1634-2H

XF93-2004 G1, fire rated

Function: Back check function is included

Delay action function is optional

Adjustable closing & latching speed

Suit for wooden and steel door

Scissor arm and slide arm are available

Optional built in HOLD-open

Non-handed

Material: Cast aluminum alloy body

Finish: Silver, optional golden


Feature: Spring power EN1-6, door weight 60-150kg

Max door width 1400mm


Max opening angle is 180° degree

Closing speed adjustable in the range 180-15° degree

Latching speed adjustable in the range 15-0° degree

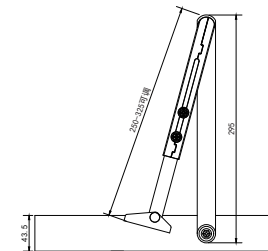

M630

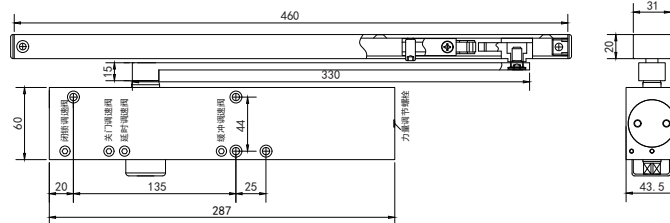

M630-G