


40-TDB

窄体机电逃生锁体(在线型)

EN Standard Electrified Mortise Lock(Solenoid)

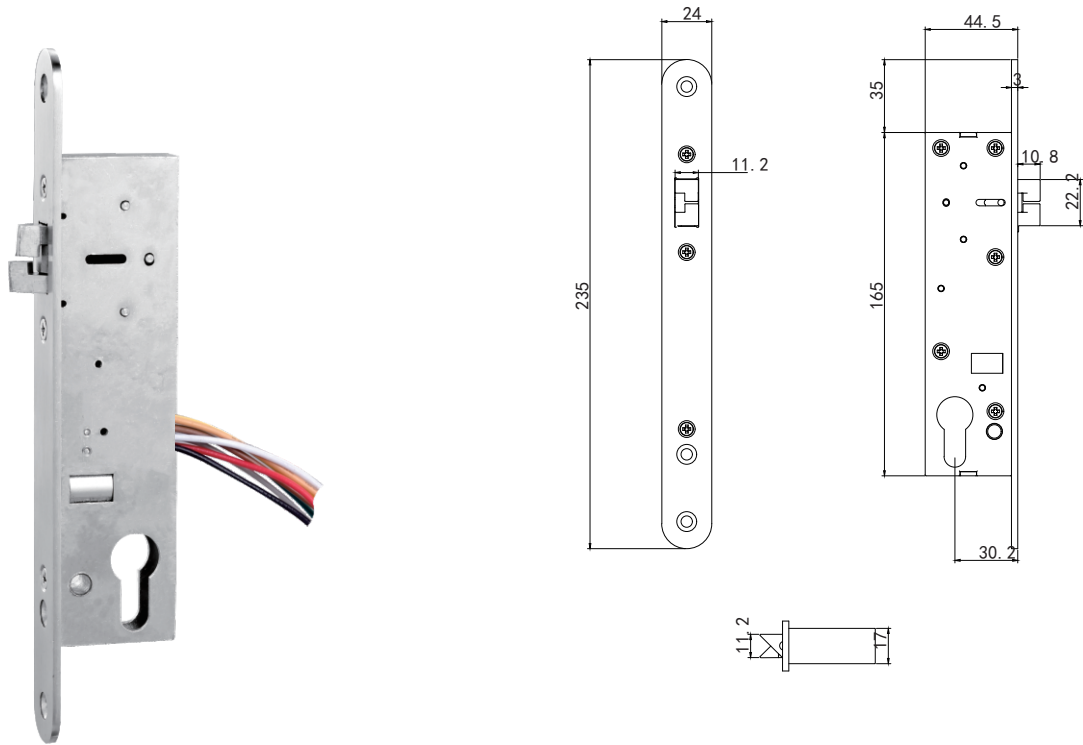

- 执行标准: 机械性能通过欧洲EN12209-2016, 20万次开启标准
逃生性能通过欧洲EN179:2008
- 信号输出: 常开C/NO,常闭C/NC
- 开锁状态: 断电开锁
- 工作电压: DC12-24V
- 工作电流: 12V/150mA;24V/90mA
- 额定功率: 1.8W
- 适用门厚: 标准门厚45-50mm, 选配门厚51-70mm
- 表面处理: SS, PVD, PS
- 防水设计, 适用于潮湿环境
- Compliance: EN12209:2016+ EN179, 200,000 life cycle
EN1634-1:2012, 4 hours fire rated
- Signal output: C/NO, fail; C/NC, secure
- Input volt: DC12-24V
- Current: 12V/150mA;24V/90mA
- Power: 1.8W
- Door thickness: standard 45-50MM, optional 51-70MM
- Finish: SS, PVD, PS
- Circuit board with waerproof design,Can be used in wet environment

- 方向开启:不分左右开启
- 适用门型:金属门
- 适用区域:高保安的公共场所

- Non handed
- Applicable door: steel door
- Application: Security and retracted accss areas